


Excellent work efficiency

- 1) Numbers in the chart are relative values when the competitor "M" is indexed at 100.
- 2) The test results depend to a great extent on sealant type or viscosity, etc.
- 3) Tested with 330ml cartridge of "#8070 Pro" silicone sealant with 5.0mm diameter of nozzle hole.
- 4) Each test tool used the following battery as the power source:
 - Makita DCG180 : 18V-1.3Ah Li-ion battery BL1815
 - Competitor "M" : 18V-1.5Ah Li-ion battery

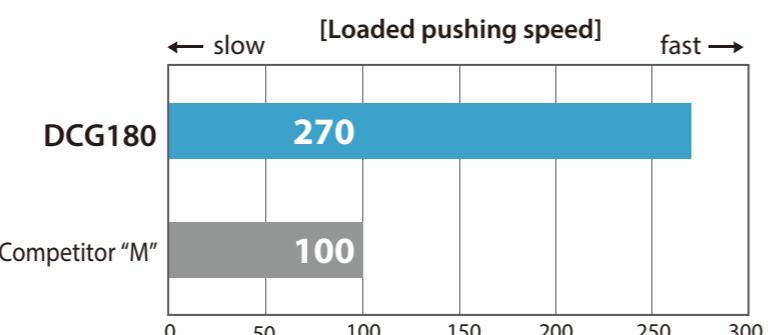

Accessories

Holder A set



Part No. 196351-8

Optional : Holder B set



Part No. 196352-6

Complete with 2 sealant holders and 3 plungers for compatibility with the following types of sealant:

	Holder A set (300ml size Holder)	Holder B set (600ml size Holder)
Compatible sealant size: mm	ø 51.0 x 215	ø 51.0 x 355
Compatible sealant type	Cartridge ø 51.0 x 215	Yes* (compatible using Piston A)
	Sausage pack ø 51.0 x 355	No Yes* (compatible using Piston B)
	Bulk sealant	No Yes (compatible using Piston C)

* for compatibility with adhesive cartridge and sausage pack

Battery Options

For Model: DCG180

BL1830:
18V 3.0AhBL1815:
18V 1.3Ah

Charger Options

DC18RC / DC18RA

Charging time (3.0Ah)
22minutes

DC18SF

Charging time (3.0Ah)
1 to 2 batteries: 60minutes
3 to 4 batteries: 120minutes

DC18SD

Charging time (3.0Ah)
60minutes

Cordless Caulking Gun | DCG180Z (Skin Only)

Variable Speed

Built-in Job Light

Carrying Case



DCG180Z

Max pushing force

5,000N (1,100lbs)

No load speed

0-28mm/sec. (0-66in/min.)

Dimensions (L x W x H)

404x108x264mm (15-7/8"x4-1/4"x10-3/8") (with Holder A set, BL1830)

404x108x281mm (15-7/8"x4-1/4"x11-1/8") (with Holder A set, BL1830)

538x108x264mm (21-1/4"x4-1/4"x10-3/8") (with Holder B set, BL1815)

538x108x281mm (21-1/4"x4-1/4"x11-1/8") (with Holder B set, BL1830)

Net Weight*

2.1kg (4.7lbs)(with Holder A set, BL1815)

2.3kg (5.1lbs)(with Holder A set, BL1830)

2.5kg (5.5lbs)(with Holder B set, BL1815)

2.7kg (6.0lbs)(with Holder B set, BL1830)

Standard Equipment: Holder, Holder Joint, Piston, Rubber Ring, Nozzle

*weight according to EPTA-Procedure 01/2003

Items of standard equipment and specifications may vary by country or area.



Makita New Zealand Ltd.

15 Orbit Drive, Mairangi Bay
PO Box 100 914, North Shore City, Auckland 0745
Fax 0800 600 601 Sales 09 479825Visit our website for information and tool features :
www.makita.co.nz

Cordless Caulking Gun

DCG180Z



**Powered by Li-ion battery for
More Efficient Operation with
Reduced Hand Fatigue**

with Holder A set
(Sealant Cartridge is optional.)



Model: DCG180



with Holder B set

Photo: DCG180

with Holder B set (600ml)



with Holder A set (300ml)



For compatibility with adhesive cartridge



Variable speed control for maximum control of sealant flow rate

Speed control dial
enables to set maximum pushing speed for optimum sealant flow rate to match the material of workpiece or the width of the gap to caulk.

Variable speed trigger switch
allows for fine adjustment of pushing speed for controlled sealant flow rate at startup and around the corner.



360 degree rotating sealant holder

Even in caulking hard to reach places, you can avoid awkward working postures by simply rotating sealant holder so that the angle of the cartridge nozzle fits over the gap to caulk.



LED job light

with pre-glow and afterglow functions



Anti-drip function

stops excess sealant from oozing out just upon release of the switch trigger by removing the residual pressure inside of sealant cartridge/holder.

Soft grip

provides comfortable grip and better control.

Overload indication lamp

Single LED light indicates how heavily the machine is loaded for preventing breakage of the sealant cartridge as follows:

- Blinking/The machine is nearly overloaded.
- Solid/The machine is overloaded; the overload circuit will shut off the power.



300ml Cartridge

(compatible using Piston A)
For compatibility with adhesive cartridge



Sausage pack

(compatible using Piston B)
For compatibility with adhesive sausage pack