



# Battery Powered Pruning Shears DUP180



Max cutting  
capacity  
**Ø30 mm**

about  
**8,000**  
pcs\*

Lightweight  
**0.68 kg**  
Tool only

Battery  
adapter  
type



\*When cutting Ø15mm branches of Japanese cypress, with BL1860B battery







Max cutting capacity

Ø30 mm

Lightweight

0.68 kg

Tool only

### Battery adapter

Cord length : 1.4m

The battery is separated by the adapter to reduce hand and arm fatigue.



Select from four angles to match branch thickness.

Thin branch

Thick branch

Ø10 mm

Ø18 mm

Ø25 mm

Ø30 mm



Main power button

Blade opening angle adjustment button



with BL1860B

Work amount on a full battery charge

When cutting Ø15mm branches of Japanese cypress

about **8,000 pcs**




## Slim and Lightweight design

The use of BL Coreless motor\*1 allows for reduction in the grip diameter and weight to reduce user's fatigue from pruning.

\*1 BL motor without iron core on which copper coil wire is wound

**BL  
MOTOR**

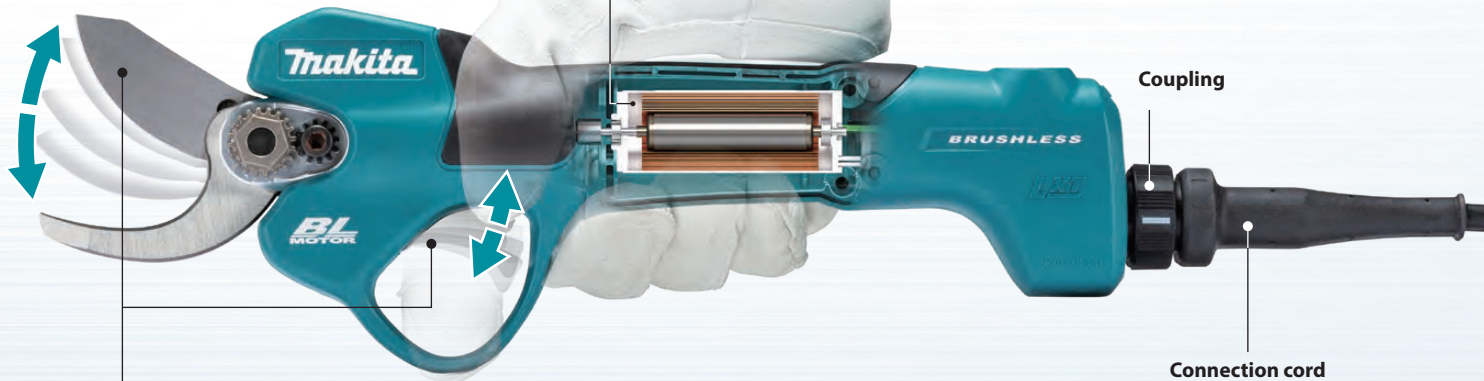

**The blades work smoothly along with the trigger due to the sensor on the motor.**


The blades respond to the trigger with sensitivity, ensuring a comfortable use experience.



## Standby mode

To turn off the tool, pull and hold the switch trigger for more than 3 seconds to close the shear blades, then release the switch trigger, and then press the main power button.

### LED indicator

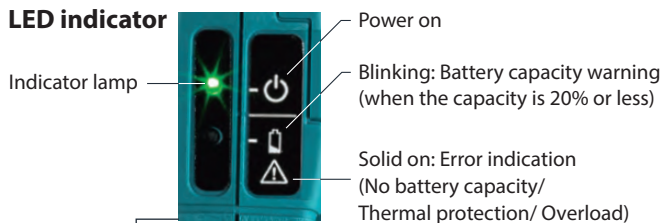

**XPT**

## Adjustment of blade overlap when closed

( by pressing and holding Blade opening angle adjustment button for 3 seconds or more when fully closed )



## External oil port

Lubrication oil can be injected without disassembling the blades.





### Cordless Pruning Saw

**DUC150**

18V

**BL XPT**



### Battery Powered Pruning Shears

**DUP362**

18V x2

**XPT**



### Cordless Earth Auger

**DDG461**

18V x2

**BL ADT XPT**



### Battery Powered Wheelbarrow

**DCU180**

18V

**BL XPT**



**DCU601**

18V x2

**BL XPT**



**DCU602**

18V x2

**BL XPT**



**DCU603**

18V x2

**BL XPT WG**



**DCU604**

18V x2

**BL XPT WG**



**DCU605**

18V x2

**BL WG**



## Accessories

### Shear blade U set

Replacement upper blade for Pruning shears



### Shear blade L set

Replacement lower blade for Pruning shears



### Dresser stone set

Dresser stone for Shear blade sharpening



### Holster

Storage and carrying of the machine



### MAKPAC TYPE3

For smart organization and easy transportation of power tools and accessories



### Charging Time

		Fast Charging	
		DC18RC	DC18SD
<b>BL1815N</b> 1.5Ah		15 min	30 min
<b>BL1820B</b> 2.0Ah		24 min	45 min
<b>BL1830B</b> 3.0Ah		22 min	60 min
<b>BL1840B</b> 4.0Ah		36 min	90 min
<b>BL1850B</b> 5.0Ah		45 min	110 min
<b>BL1860B</b> 6.0Ah		55 min	130 min

### Battery Powered Pruning Shears

#### DUP180

- Brake
- Anti-restart function
- Torque Limiter
- Carrying Case

Capacity	Max cutting: 30 mm (1-3/16")
Vibration level	2.5 m/s <sup>2</sup> or less
Sound pressure level	70 dB(A) or less
Dimensions* (L x W x H)	296 x 40 x 99 mm (11-5/8 x 1-9/16 x 3-7/8")
Net weight*	0.68 kg (1.5 lbs.)

\*Without standard equipment such as battery, battery adapter, harness, and controller for operation

#### Standard Equipment :

Oil spray, Hex wrench, Socket wrench, Dressing stone, Holster, Battery, Charger

The weight according to EPTA-Procedure 01/2014 is shown in the table.  
Items of standard equipment and specifications may vary by country or area.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202311