



Cordless Grass Trimmer DUR189



**Better maneuverability
regardless of user's
size by telescopic pipe**



with Nylon cord

(Two Strings come out from separate openings)



with Plastic blade

(Three-blade cutter)



Comfortable short telescopic pipe provides easy handling in tight spaces



Telescopic pipe

adjustable in length from 1,518mm (59-3/4") to 1,618mm (63-3/4")



High performance with brushless DC Motor

Wire guard

- reduces the risk of damaging fences, flowers or ornaments.
- foldable for convenience

Smaller protector for better view of cutting area


Compact protector for nylon cutting head provides better view of the blade tips, without losing the performance for prevention of scattering of grass clippings.



Automatic torque Drive Technology

automatically changes the cutting speed according to load conditions for an optimum operation:

- On light duty: high-speed rotation mode
- On heavy duty: high torque mode

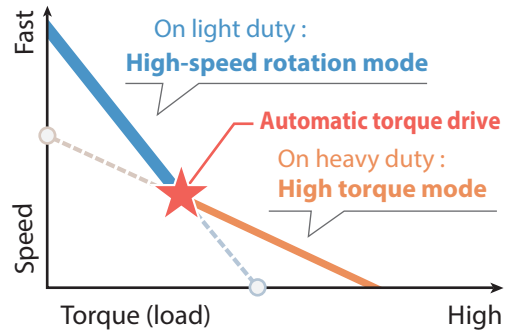

All control devices are conveniently located near your hand.

Speed indicator shows three rpm levels. Also shows the status of overload, overheat and overdischarge.

Auto speed control indicator (ADT mode)

Power lamp

Reverse button for easy removal of grass clippings from the cutting tool (with plastic blade) After 1.5 seconds, machine stops. Switch position will be returned back to "Forward" automatically after stopping.

Main power button



Extreme Protection Technology

Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather.

Run time (min)

On a single full battery charge

Cutting blade	Battery	No load		
		High	Middle	Low
with Nylon cord diameter: ø2.0 mm (Two Strings come out from separate openings)	BL1850B	55	83	139
with Plastic blade Trimming width: ø255mm (Three-blade cutter)	BL1850B	102	121	181

Cordless Grass Trimmer

DUR189

Brake	No Load Speed (RPM) High / Medium / Low / ADT Mode: 6,000 / 5,000 / 4,000 / 4,000 - 6,000
Reversing	Cutting Width Trimmer Head: 300 mm (11-3/4") Plastic Blade: 255 mm (10")
Electronic 3-Speed	Spindle Size M8 x 1.25 RH
Constant Speed	Sound Pressure Level 78 dB(A)
Soft Start	Vibration Level Front / Rear 2.5 / 2.5 m/s ² or less
	Dimensions (L x W x H) 1,518-1,618x258x396mm
	Net weight 3.0 - 3.3 kg (6.6 - 7.3 lbs.)

Standard Equipment:

Shoulder Strap, Nylon Cutting Head, Plastic Blade, Safety Goggles, Accessory Bag, Hex Wrench, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201804