



Angle Grinder
 GA7030/ S, GA7040/ S 180mm (7")
 GA9030/ S, GA9040/ S 230mm (9")

Outstanding Durability



Option

Anti Vibration AVT Grip Part No. 194290-6



Loop Handle Part No. 192619-0



Plastic carrying case Part No. 824755-1



Dust Collecting Wheel Guard Part No. 194044-1



Dust Covers Part No. 194289-1
 Protect motor from metal dust.



Angle Grinder GA7030/ S/ GA7040/ S 180mm (7") / GA9030/ S/ GA9040/ S 230mm (9") 204

-  Double Insulation
-  Soft Start (GA7030S/ GA7040S/ GA9030S/ GA9040S)
-  Torque Limiter



	GA7030/ GA7030S	GA7040/ GA7040S	GA9030/ GA9030S	GA9040/ GA9040S
Continuous rating Input	2,400W	2,600W	2,400W	2,600W
Capacity (Depressed center wheel)	180mm (7")		230mm (9")	
Hole dia.	22.23mm (7/8")		22.23mm (7/8")	
No load speed	8,500rpm		6,600rpm	
Dimensions (L x W x H)	511mm x 200mm x 140mm (20-1/8" x 7-7/8" x 5-1/2")		511mm x 249mm x 140mm (20-1/8" x 9-3/4" x 5-1/2")	
Net weight*	6.0kg (11.2lbs)	6.4kg (14.0lbs)	6.3kg (13.9lbs)	6.6kg (14.6lbs) GA9040 6.7kg (14.8lbs) GA9040S
Power supply cord	2.5m (8.2ft)		2.5m (8.2ft)	

Standard Equipment : Lock Nut wrench, Grip (Tool does not come with depressed center wheel)

*weight according to EPTA-Procedure 01/2003 *Items of standard equipment and specifications may vary by country or area.*



Angle Grinder
 GA7030/ S, GA7040/ S 180mm (7")
 GA9030/ S, GA9040/ S 230mm (9")

Outstanding Durability



Option

Anti Vibration AVT Grip Part No. 194290-6

Loop Handle Part No. 192619-0

Plastic carrying case Part No. 824755-1

Dust Collecting Wheel Guard Part No. 194044-1

Dust Covers Part No. 194289-1
 Protect motor from metal dust.

Angle Grinder GA7030/ S/ GA7040/ S 180mm (7") / GA9030/ S/ GA9040/ S 230mm (9") 204

- Double Insulation
- Soft Start (GA7030S/ GA7040S/ GA9030S/ GA9040S)
- Torque Limiter



	GA7030/ GA7030S	GA7040/ GA7040S	GA9030/ GA9030S	GA9040/ GA9040S
Continuous rating Input	2,400W	2,600W	2,400W	2,600W
Capacity (Depressed center wheel)	180mm (7")		230mm (9")	
Hole dia.	22.23mm (7/8")		22.23mm (7/8")	
No load speed	8,500rpm		6,600rpm	
Dimensions (L x W x H)	511mm x 200mm x 140mm (20-1/8" x 7-7/8" x 5-1/2")		511mm x 249mm x 140mm (20-1/8" x 9-3/4" x 5-1/2")	
Net weight*	6.0kg (11.2lbs)	6.4kg (14.0lbs)	6.3kg (13.9lbs)	6.6kg (14.6lbs) GA9040 6.7kg (14.8lbs) GA9040S
Power supply cord	2.5m (8.2ft)		2.5m (8.2ft)	

Standard Equipment: Lock Nut wrench, Grip (Tool does not come with depressed center wheel)

*weight according to EPTA-Procedure 01/2003 Items of standard equipment and specifications may vary by country or area.



Makita New Zealand Ltd.
 15 Orbit Drive, Mairangi Bay
 PO Box 100 914, North Shore, Auckland 0745
 Fax 0800 600 601 Sales 09 479 8251


Visit our website for information and tool features:
www.makita.co.nz

The Inside of the Creature Is...

Outstanding Durability


/// Superior Anti-Dust Structure

Protective zigzag varnish on armature coil.
Protective powder varnish-coating on field coil.
Bearing-protective labyrinth construction.
Vent slots designed to minimize dust entrance.

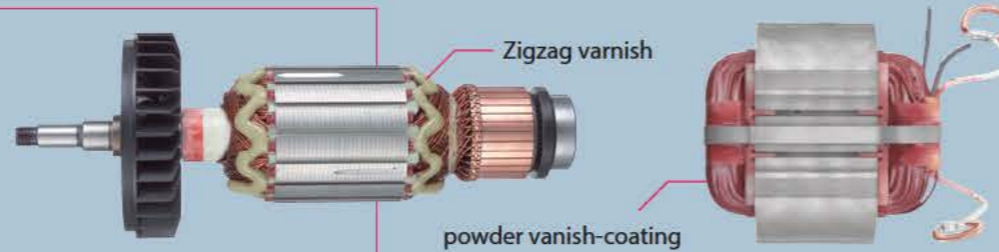

/// Machined Bevel Gear

having durability higher than sintered gear.



/// Large Rubber Tool Rest

/// Increased Heat Resistance

superior to our predecessor models.

/// Torque Limiter

/// Large-boned shaft having durability



/// Rotatable Rear Handle

Can be positioned to suit most cutting and grinding operations. (90 degrees R/L)



/// Low Vibration Rear Handle

with soft grip for more comfort and control.



/// Vibration Absorbing Side Grip (option)



/// Heavy Duty Motor

180mm (7") GA7030/ S	2,400W	GA7040/ S	2,600W
230mm (9") GA9030/ S	2,400W	GA9040/ S	2,600W