



Cordless Demolition Hammer HM001G



Adapted for SDS-MAX bits



40V Li-ION max

Impact energy
[EPTA-Procedure 05/2009]

9.4 Joule



Higher power than corded tools




Impact energy
 [EPTA-Procedure 05/2009]
9.4
 Joule

HM001G	9.4 Joule
AC tools	8.1 Joule

Anti-Vibration Technology

AVT Vibration level at main handle
6.0 m/s²


Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.

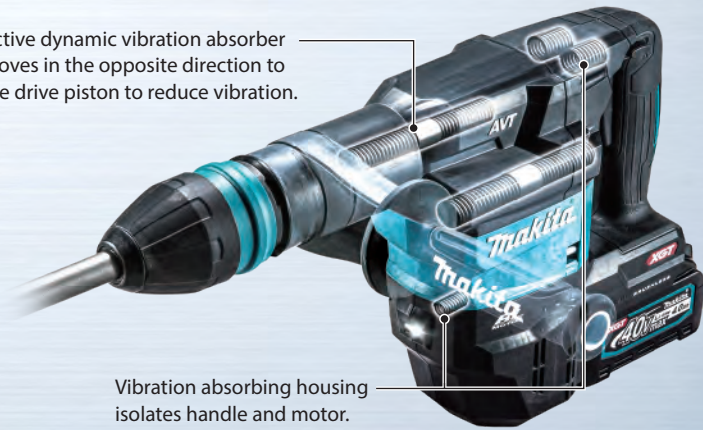

Vibration absorbing housing isolates handle and motor.


SOFT NO LOAD

Suppression of motor speed during no-load

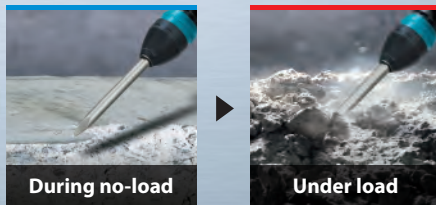


AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

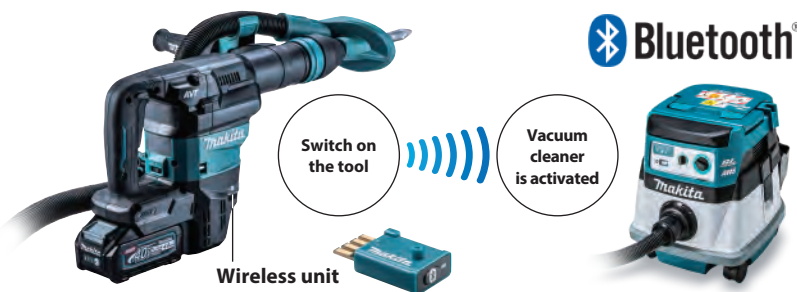

XPT eXtreme Protection Technology

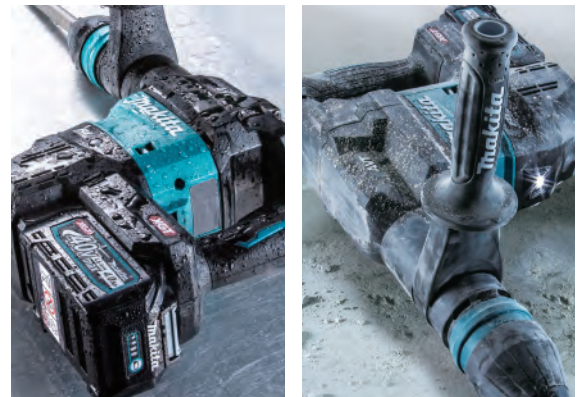

BL MOTOR
 High power
 Brushless motor



Power than corded tools



Adapted for SDS-MAX bits

12 bit angle settings

Type


Side grip



Side handle (option)



Twin LED job lights



Slide lever for trigger lock-on / lock-off

Trigger lock-on/lock-off can be set simply by pushing the slide lever:

- For lock-on of the trigger, pull and hold the trigger, then push the slide lever.
- For lock-off of the trigger, push the slide lever without pulling the trigger.



5-stage max speed selection by dial with variable control by trigger in each range

enables user to match the speed to the application for greater versatility.




High Power
Durability
Digital Communication



Rotary Hammer
HR006G



Demolition Hammer
HM002G

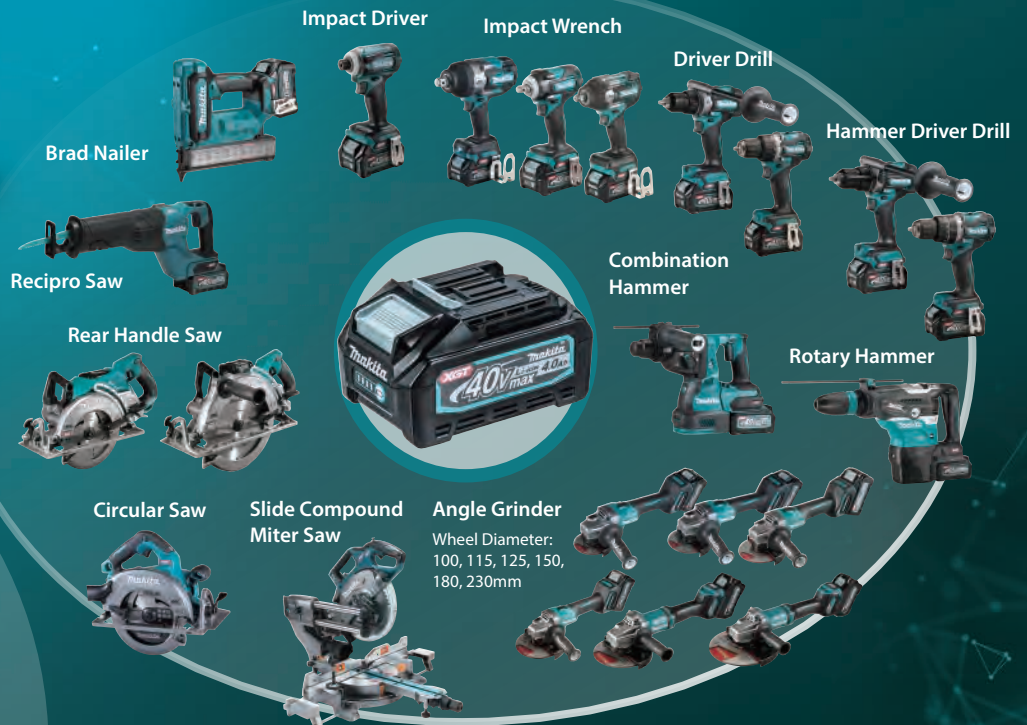

Portable Power Pack

PDC01

Powered by up to four 18V LXT batteries



PDC1200

Equipped with built-in battery cells



Charger: DC4001
Charging time: 6hours



Adapter set (40Vmax)

Part No. 191N62-4

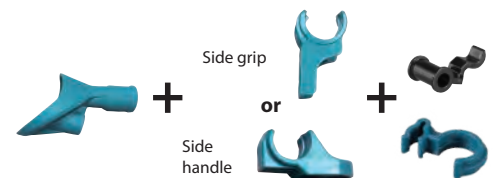


photo: HR005G

Accessories

Dust Extractor Attachment Set

without Vacuum hose set
Part No. 199143-4
with Vacuum hose set
Part No. 199144-2



Side handle

Part No. 136362-1



Charging Time Reference

	DC40RA <small>Fast Charging</small>	DC40RC
	45min	67min
	50min	85min

Cordless Demolition Hammer

HM001G Adapted for SDS-MAX bits

Variable Speed	Impact Energy	EPTA-Procedure 05/2009: 9.4 J
Adapted for SDS-MAX bits	Blows Per Minute (BPM)	0 - 2,650
Constant Speed	Shank Diameter	18 mm (11/16")
Soft Start	Sound Pressure Level	89 dB(A)
Built-in Job Light	Sound Power Level	100 dB(A)
Carrying Case	Vibration Level	Chiselling Function w/ Side Handle: 6.0 m/s ² Chiselling Function w/ Side Grip: 5.5 m/s ²
	Dimensions (L x W x H)	w/ BL4040: 496 x 113 x 258 mm (19-1/2 x 4-7/16 x 10-1/8") w/ BL4050F: 516 x 113 x 280 mm (20-1/4 x 4-7/16 x 11")
	Net weight	6.3 - 7.1 kg (13.9 - 15.7 lbs.)

Standard Equipment: Bull Point, Bit Grease, Side Grip (country-specific), Wireless Unit (country-specific), Wireless Unit Adapter (country-specific), Cloth, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202102