



Cordless Edger
UE001G



40V Li-Ion
max

High power output
similar to 30cm³ class
engine-powered edgers



Max output

1.1 kW

Max cutting depth

59 mm

BL **AFT** **XPT**
MOTOR

Powered by a 40Vmax XGT Li-Ion battery, equipped with a BL motor, and delivering a maximum output of 1.1 kW




Guard with high visibility of the blade

Guard with improved visibility of the blade tip while maintaining the coverage angle.



Cutting depth adjustment

The working depth can be adjusted by adjusting the tire height.



AFT
Active Feedback sensing Technology

shuts down current to the motor, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

BL MOTOR




New lock-off mechanism

By adding a lock lever to the lock-off lever, we have revised the automatic power-off time, enhancing work efficiency.




Guard plate

Protects Gear case from wear due to contact with the ground during operation at the maximum cutting depth.



XPT / IPX4
-compatible

High water-resistance allows the user to operate the tool even if it is wet with water.

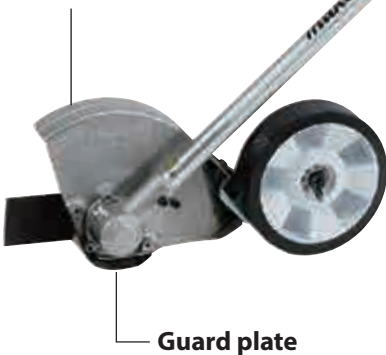

Guard plate

Accessories

Blade set

Part No. 196745-7



Charging Time

		Fast Charging	
		DC40RA	DC40RC
BL4020	2.0Ah	22 min	30 min
^{*1} BL4025	2.5Ah	28 min	38 min
^{*1} BL4040/F	4.0Ah	45 min	67 min
^{*1} BL4050F	5.0Ah	50 min	85 min
^{*1} BL4080F	8.0Ah	76 min	170 min

^{*1} Recommended battery

Cordless Edger

UE001G

Variable Speed	Max output	1,100 W
Brake	Blade diameter	203 mm (8")
Constant Speed	Max cutting depth	59 mm (2-5/16")
Soft Start	No load speed	0-4,800 min ⁻¹
Anti-restart function	Continuous use w/BL4050F:	18 min (w/ load)
	Sound pressure level ^{*1}	75.5 dB (A)
	Sound power level ^{*1}	89.4 dB (A)
	Noise K factor ^{*1}	2.4 / 2.6 dB (A)
	Vibration level ^{*2}	2.5 m/s ² or less
	Vibration K factor ^{*2}	1.5 m/s ²
	Dimensions (L x W x H)	w/ Blade, w/ out Battery 1,860 x 227 x 303 mm (73-1/4 x 8-15/16 x 11-7/8")
	Net weight	6.1 kg - 7.3 kg (13.4lbs - 16.1lbs)
	Net weight (Battery)	BL4020 - BL4080F

Standard Equipment : Blade, Box wrench, Hex wrench, Accessory bag

The weight may differ depending on the attachment(s), including the battery cartridge.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

