



125mm Cordless Cutter series

Cuts up to 40 mm with 125 mm wheel



**Cordless
Dustless Cutter**

DCC500 125 mm (5")
Dry cutting



Cordless Cutter

DCC501 125 mm (5")

Wet cutting



**Rotation
speed** 8,800min⁻¹

BL **AWS** **ADT** **XPT**
MOTOR

BL motor provides high power and excellent cutting performance



Cordless Dustless Cutter DCC500



360° rotatable dust collecting port

Cordless Cutter DCC501



Water supply attachment with a tank capacity of 500mL

Powered by 18V LXT Li-Ion battery



Single LED job light with afterglow function.



Bevel cut up to 45 degrees enables bevel cutting of bricks.



Auto-start Wireless System



Automatic speed control



eXtreme Protection Technology



Work amount Battery: BL1850B on a single full charge

Cut 600mm groove in bricks at the depth of 10mm

DCC500: about **16m** (Dry type 125mm Diamond wheel)

Cut off ceramic tiles with 600mm length and 9.5mm thickness

DCC501: about **25m** (Wet type 105mm Diamond wheel)

Accessories

Dust bag assembly
Part No. 126738-0



Dust cover set
Part No. 191N83-6



Water supply cover set A
Part No. 191M48-2




Water supply hose complete A
Part No. 140Y23-7



Base cover set
Part No. 196943-3



Guide rail adapter set
Part No. 198673-2




Guide rail

length	Part No.
1.0m	199140-0
1.4m	194368-5
1.5m	199141-8
1.9m	194925-9
3.0m	194367-7

Clamp set

Type	Part No.
Standard	194385-5
Quick	199826-6

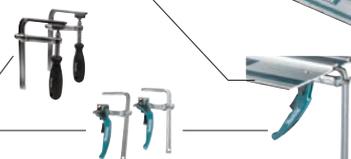

Cordless Dustless Cutter	DCC500 125 mm (5")
Cordless Cutter	DCC501 125 mm (5")

Brake	125 mm (5")
Soft Start	20 mm (13/16")
Bevel Cutting 45 left	Max Cutting Capacity
	90°: 40.0 mm (1-9/16")
Dust Collection	45°: 27 mm
	No Load Speed (RPM)
Built-in Job Light	8,800
	Vibration Level
Carrying Case	Concrete Cutting: 4.0 m/s ²
	Sound Pressure Level
Sound Power Level	
Dimensions (L x W x H)	
BL1830B / BL1840B / BL1850B / BL1860B:	
DCC500: w/ 283 x 158 x 172 mm	
DCC501: 283 x 163 x 172 mm	
(11-1/8 x 6-1/4 x 6-3/4")	
(11-1/8 x 6-3/8 x 6-3/4")	
Net weight	
DCC500: 2.6 - 3.1 kg (5.7 - 6.8 lbs.)	
DCC501: 2.7 - 3.1 kg (6.0 - 6.8 lbs.)	

Standard Equipment:

DCC500: Diamond Wheel, Dust Bag, Hex Wrench
DCC501: Diamond Wheel, Water Supply Tank Assembly, Dust Bag, Hex Wrench

The weight may differ depending on the attachment(s), including the battery cartridge.
The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202101